




Overview

The PMC-1304-3 is an ideal instrument to connect serial devices to an IP based Ethernet LAN for any industrial automation systems that require isolation protection as well as high reliability. The Basic Model provides Modbus TCP to RTU Gateway function and supports interrogation from multiple Modbus TCP Masters. The optional RTU Model features 4GB On-Board Memory for local data caching and logging to enhance overall system performance and provides data redundancy. The PMC-1304-3 comes with Tx/Rx LEDs for the serial ports on the Front Panel. The LEDs not only indicate the network status but also help to monitor the communications activities of the attached serial devices. The PMC-1304-3 has been specifically designed with industrial automation in mind and therefore provides un-surpassed performance and reliability under the harshest industrial environments. The PMC-1304-3 can be setup through its user-friendly web console or via our free PMC-EasyCom software.

Typical Applications


Modbus TCP to RTU Gateway

The PMC-1304-3 supports the Modbus TCP to RTU Gateway function that makes it extremely simple for any Modbus TCP Master Applications to interface with Modbus RTU enabled IEDs over a local area network. A simple web-based interface allows users to easily configure the TCP to RTU address mapping and which downstream RS-485 port the IEDs are located.

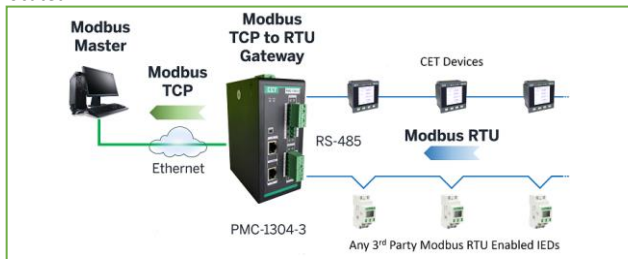

Data Logging

The RTU model supports embedded Modbus RTU mastering as well as Local Data Caching and Data Logging of real-time parameters from Modbus RTU enabled IEDs for a maximum of 25,600 data points. The device can be configured to perform data logging from 1-minute to 60-minute intervals. With its large on-board non-volatile memory, the device is capable of storing more than 2-year worth of data at 60-minute recording interval. These features enhance the overall system performance and reliability, reduce the CPU loading of the server applications such as EMS, BMS or SCADA and provide an extra level of data redundancy for IEDs without memory.

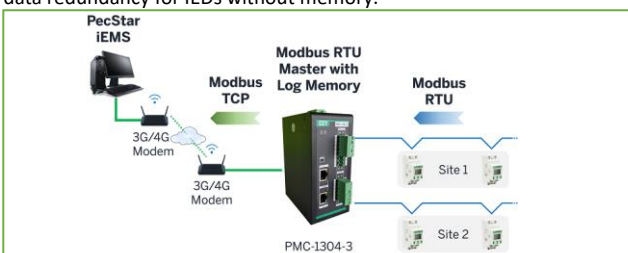


Features

- Designed to withstand the harshest environments
 - 15kV (contactless) & 6kV (contact) ESD protection and 3kV isolation protection for all Serial ports
 - 1.5kV isolation protection for Ethernet ports
- Dual 10/100BaseT (RJ45)
- Standard 2xRS-485, optional up to 4xRS-485
- Modbus Gateway function
- Multiple Upstream Applications support
- Simple port configuration via its built-in web interface
- One-key Reset to default factory
- DIN-Rail or Panel Mounting
- Extended operating temperature
- **Basic T Model**
 - 64 Slave IEDs per RS-485/Ethernet port or maximum of 384 Slave IEDs per device
 - 4 Modbus TCP Masters per device
- **Optional RTU Model**
 - 64 Slave IEDs per RS-485/Ethernet port or maximum of 384 Slave IEDs per device
 - 16 Modbus RTU Masters per device
 - Modbus RTU Mastering
 - 4GB On-Board Log Memory
 - Local Data Caching and Logging
 - FTP Server and SFTP Client Support
 - Automatic Data Log push to external


Multiple Modbus TCP Master Support

The PMC-1304-3 supports multiple Modbus TCP Masters simultaneously to facilitate information sharing while minimizing the implementation cost. For highly data or communication intensive applications, the RTU model is recommended.

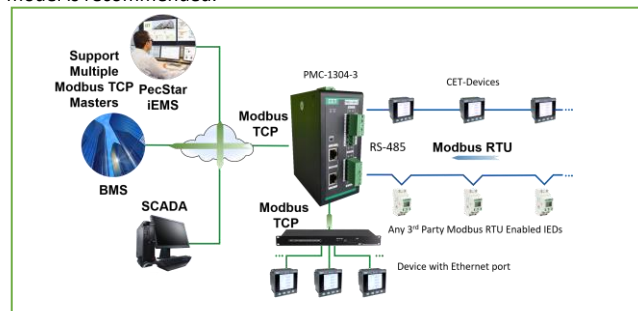

SFTP Client Support

The RTU Model can be configured as an SFTP Client to automatically push the most recent data log files in CSV format to an external SFTP Server over an intranet or internet at pre-determined intervals from hourly to weekly. This is especially useful for distributed or remote Energy Management applications where real-time data update is not required. The log files will be deposited at the SFTP Server at scheduled intervals which can then be processed by 3rd party applications.

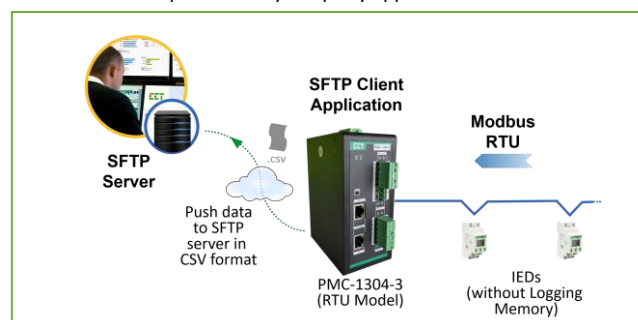


Designed For Reliability

Manufactured To Last




PMC-1304-3 Communications Processor


Device Dimensions

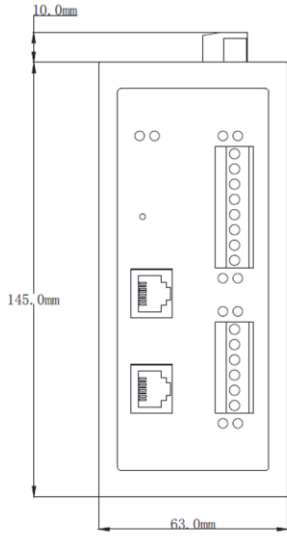

Front View

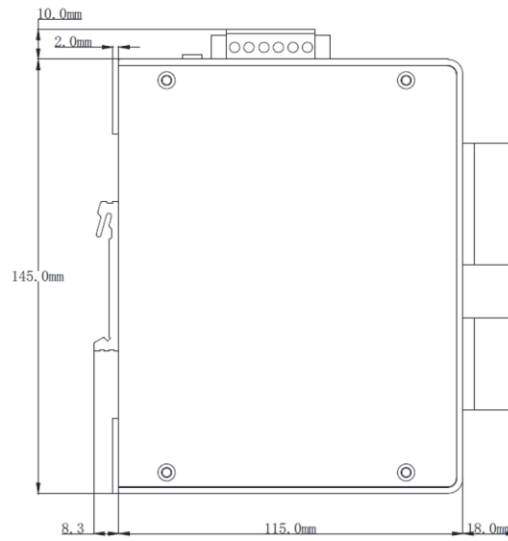


Side View

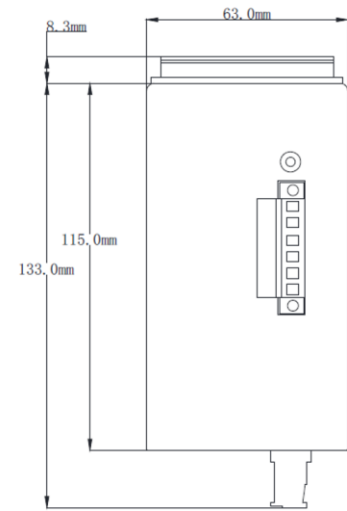


Top View

Installation Diagrams

DIN-Rail Mounting

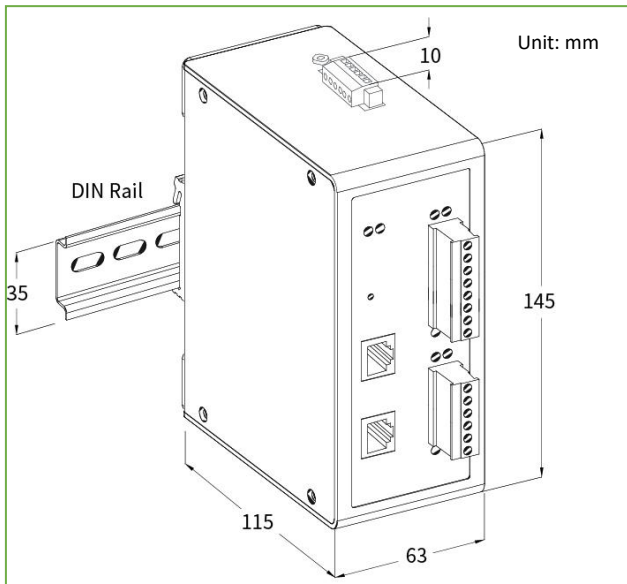

Panel Mounting

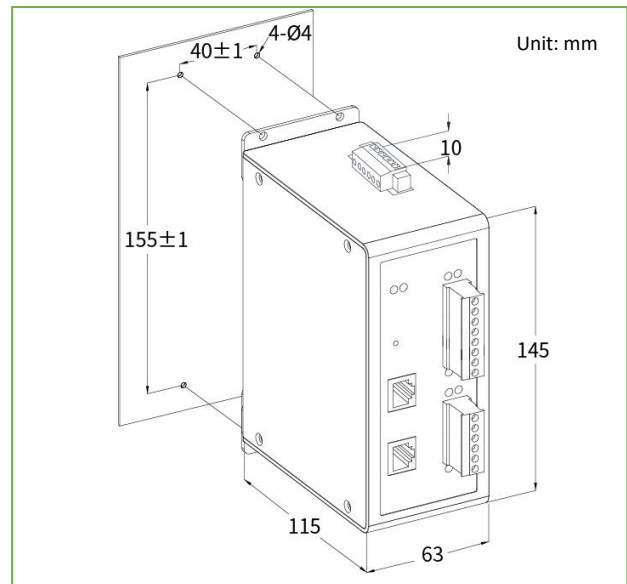

Web Interfaces

PMC-1304 Web Console

Device Settings

- Network
 - Time
 - FTP Password
- Channel Management
 - Channel Settings
 - Slave IED Management
 - Driver Management
 - Modbus Gateway
- Data Cache Management
 - Cache Management
 - Data Cache
- System Maintenance
 - Password Setup
 - Statistics
 - Clear History
 - Backup/Restore
 - System Information
 - Reboot

Submit

Ethernet 1

IP Address: 192.168.0.127
Subnet Mask: 255.255.255.0

Ethernet 2

IP Address: 192.168.1.127
Subnet Mask: 255.255.255.0

Others

Default Gateway: 192.168.1.1
DNS1:
DNS2:

Copyright © 2020 CET Electric Technology Inc. All Rights Reserved.

PMC-1304 Web Console

Device Settings

- Network
 - Time
 - FTP Password
- Channel Management
 - Channel Settings
 - Slave IED Management
 - Driver Management
 - Modbus Gateway
- Data Cache Management
 - Cache Management
 - Data Cache
- System Maintenance
 - Password Setup
 - Statistics
 - Clear History
 - Backup/Restore
 - System Information
 - Reboot

Submit

Serial Ports	Enabled	Description	Channel Config	Baudrate	Data Bits	Parity	Stop Bits	Advanced
P3	✓	Channel 1	ModbusMaster	9600	8	Even	1	⊞
P4	✓	Channel 2	ModbusMaster	9600	8	Even	1	⊞
P5	✓	Channel 3	ModbusMaster	9600	8	Even	1	⊞
P6	✓	Channel 4	ModbusMaster	9600	8	Even	1	⊞

Ethernet Ports	Enabled	Description	Channel Config	Advanced
P1	✓	Channel 5	ModbusTCPMaster	⊞
P2	✓	Channel 6	ModbusTCPMaster	⊞

Copyright © 2020 CET Electric Technology Inc. All Rights Reserved.

Designed For Reliability

Manufactured To Last



Technical Specifications

Communication		
10/100 Base Ethernet Ports (P1, P2)		
Standard Cable	10/100BaseT, RJ45 connector CAT5, CAT5e (100m maximum)	
Serial Ports (P3, P4, P5, P6)		
Standard	1xRS-422/485 (P3), 1xRS-485 (P4)	
Optional	1xRS-422/485 (P3), 3xRS-485 (P4,P5,P6)	
Comm. Parameters		
Data bits	5, 6, 7, 8	
Stop bits	1, 2	
Parity	None, Even, Odd, Mark, Space	
Baud rate	300 to 115,200 bps	
LED Indicators		
Run (Green)	On	System is running abnormally
	Blinking	Power is on and system is running normally
	Off	Power off or system is running abnormally
Alarm (Red)	On	Abnormal condition
	Blinking	Restoring default parameters
P3, P4, P5, P6	Tx (Yellow)	Blinking Receiving data
	Rx (Green)	Blinking Transmitting data
Protocol		
Protocol	Modbus RTU, Modbus TCP, FTP, SFTP, HTTP	
Power Supply (L/+, N/-)		
Standard	95-250VAC/DC, 47-440Hz	
Optional	20-60VDC Single Power Supply	
Burden	20-60VDC Dual Power Supply ≤5W	
Protection		
ESD Protection	15kV (Contactless) and 6kV (Contact) ESD protection for all serial signals	
Isolation Protection	3kV for all Serial signals 1.5kV for Ethernet Ports	
Environmental Conditions		
Operating Temp.	-25°C to +70°C	
Storage Temp.	-40°C to +85°C	
Humidity	5% to 95% non-condensing	
Atmospheric Pressure	70 kPa to 106 kPa	
Mechanical Characteristics		
Casing	Galvanized Iron	
Unit Dimensions	115x63x145mm	
Shipping Weight	0.95kg	
Shipping Dimensions	300x210x150mm	
Mounting	DIN-Rail or Panel Mounting	
IP Rating	30	

Ordering Information

Product Code		Description		
PMC-1304-3 Communications Processor				
Basic Function				
T		Modbus TCP/RTU Gateway with Multi-Master Support		
R*		Modbus Mastering with 4GB On-Board Storage		
Serial Port				
00-02		1xRS-422/RS-485 + 1xRS-485 (P3-P4)		
00-04*		1xRS-422/RS-485 + 3xRS-485 (P3-P6)		
Power Supply				
2		95-250VAC/DC, 47-440Hz		
3*		20-60VDC Single Power Supply		
4*		20-60VDC Dual Power Supply		
Ethernet Port				
T2-XX-XXXX		10/100BaseT (P1, P2)		
Interface Language				
E		English		
PMC-1304-3	- T -	00-02 - 2 -	T2-XX-XXXX - E	PMC-1304-3-T-00-02-2-T2-XX-XXXX-E (Standard Model)

* Additional charges apply

Standard of Compliance

Safety Requirements	
Insulation	EN61010-1: 2010 EN61010-2-030: 2010
Dielectric Test	2kV @ 1 minute
Insulation Resistance	>100MΩ
Impulse Voltage	5kV, 1.2/50μs
Electromagnetic Compatibility CE EMC Directive 2014 / 30 / EU (EN 61326: 2013)	
Immunity (EN50082-2)	
Electrostatic Discharge	EN 61000-4-2: 2009
Radiated Fields	EN 61000-4-3: 2006+A1: 2008+A2: 2010
Fast Transients	EN 61000-4-4: 2012
Surges	EN 61000-4-5: 2014+A1: 2017
Conducted Disturbances	EN 61000-4-6: 2014
Magnetic Fields	EN 61000-4-8: 2010
Voltage Dips and Interruptions	EN 61000-4-11: 2004+A1: 2017
Emission (EN50081-2)	
Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment	EN 55011: 2016
Electromagnetic Compatibility of Multimedia Equipment - Emission Requirements	EN 55032: 2015
Limits for Harmonic Current Emissions for Equipment with Rated Current ≤16 A	EN 61000-3-2: 2014
Limitation Of Voltage Fluctuations And Flicker In Low-Voltage Supply Systems For Equipment With Rated Current ≤16 A	EN 61000-3-3: 2013
Emission Standard for Residential, Commercial and Light-Industrial Environments	EN 61000-6-4: 2007+A1: 2011
Mechanical Tests	
Spring Hammer Test	IEC 62052-11: 2003
Vibration Test	IEC 62052-11: 2003
Shock Test	IEC 62052-11: 2003

CET Electric Technology Inc.

E: sales@cet-global.com

W: www.cet-global.com

Your Local Representative

Revision Date: September 08, 2023

Designed For Reliability

Manufactured To Last