



- IEC 62053-22 Class 0.5S
- True RMS @ 64 Samples/Cycle
- THD with 31<sup>st</sup> Ind. Harmonics
- Crest Factor and TDD
- Unbalance & Phase Angle
- TOU & Demands
- Max./Min. Log with Timestamps
- Modbus RTU
- Large, Backlit, 7-Segment LCD
- 12 Monthly Energy Log & SOE Log
- Setpoint and I/O
- IP65 Enclosure with No Openings
- Standard Tropicalization
- Industrial Grade Components
- Extended Temperature
- Extended Warranty



The PMC-S963-C Intelligent Multifunction Meter is CET's latest offer for the low-cost digital power/energy metering market. Housed in a standard DIN form factor measuring 96x96x92mm, it is perfectly suited for industrial, commercial and utility applications. The PMC-S963-C features quality construction, multifunction measurements and a large, backlit, 7-Segment LCD that is easy to navigate and user friendly. Compliance with the IEC 62053-22 Class 0.5S Standard, it is a cost-effective replacement for analog instrumentation that is capable of displaying 3-phase measurements at once. It comes standard with four Digital Inputs for status monitoring. In addition, it optionally provides 2xDO, 1xSS Pulse Output and 1xAO for different applications. The standard RS-485 port and Modbus RTU protocol support makes the PMC-S963-C a smart metering component of an intelligent, multifunction monitoring solution for any Energy Management System.

### Typical Applications

- Industrial, Commercial and Utility Substation Metering
- Building, Factory and Process Automation
- Sub-metering and Cost Allocation
- Energy Management and Power Quality Monitoring

### Features Summary

#### Ease of use

- Large, backlit, 7-Segment LCD display with wide viewing angle
- Intuitive user interface
- LED indicators for Energy Pulsing and Communication activities
- Password protected setup via Front Panel or free setup software
- Easy installation with mounting clips, no tools required

#### Basic Measurements

- True RMS @ 64 Samples/Cycle
- ULN, ULL per Phase and Average
- Current per Phase and Average with calculated Neutral
- P, Q, S, PF per Phase and Total
- Total RMS kWh, kvarh Import/Export/Net/Total and kVAh Total
- Per-phase kWh, kvarh Import/Export
- Frequency

#### Advanced Measurements

- U and I THD, TOHD, TEHD, TH (RMS) and Individual Harmonics up to 31<sup>st</sup>
- Current TDD, TDD Odd, TDD Even and Crest Factor
- U and I Sequence, Unbalance and Phase Angle
- Fundamental U and I per Phase
- kvarh Q1-Q4
- P Present and Predicted Demands as well as Max. Demands with Timestamp for This Month & Last Month (or Since Last Reset & Before Last Reset)
- One TOU schedule providing
  - 4 Seasons
  - 4 Daily Profiles, each with 14 Periods in 15-minute interval
  - 4 Tariffs, each providing kWh Import
- 12 monthly recording of kWh/kvarh Import/Export/Total/Net, kVAh Total, kvarh Q1-Q4 as well as kWh Import per Tariff

#### Setpoints

- 9 user programmable setpoints with extensive list of monitoring parameters including Voltage, Current, Power, P Demand, Unbalance, Phase Reversal and THD, etc.
- Configurable thresholds, time delays and DO triggers

#### SOE Log

- 32 events time-stamped to  $\pm 1\text{ms}$  resolution
- Setup changes, Setpoint and DI status changes and DO operations

#### Max./Min. Log

- Max./Min. Log with Timestamp for Real-time measurements such as Voltage, Current, In (Calculated), Freq., P, Q, S, PF, Unbalance and THD
- Configurable for This Month & Last Month (or Since Last Reset & Before Last Reset)

#### Diagnostics

- Loss of Voltage/Current
- P Direction per Phase and Total
- Incorrect U & I Phase Sequence

#### Communications

- Optically isolated RS-485 port at max. 38,400 bps
- Standard Modbus RTU support

#### Real-Time Clock

- Battery-backed Real-time Clock with 25ppm accuracy (<2s per day)

#### System Integration

- Supported by CET's PecStar® iEMS
- Easy integration into other Automation, SCADA or BMS systems via Modbus RTU

### Inputs and Outputs

#### Digital Inputs

- 4 channels, volt free dry contact, 24VDC internally wetted
- 1000Hz sampling for status monitoring with programmable debounce

#### Digital Outputs

- 2 Form A Mechanical Relays for alarming and general purpose control

#### Pulse Output

- 1 Form A Solid-State Relay for kWh and kvarh pulsing


#### Analog Output (Optional)

- One channel 0/4-20mA DC output with programmable zero and full scales

### Accuracy

Parameters	Accuracy	Resolution
Voltage	$\pm 0.2\%$	0.001V
Current	$\pm 0.2\%$	0.001A
In (Calculated)	$\pm 1.0\%$	0.001A
P, Q, S	$\pm 0.5\%$	0.001kX
kWh	IEC 62053-22 Class 0.5S	0.1kWh
kvarh	IEC 62053-23 Class 2	0.1kvarh
PF	$\pm 0.5\%$	0.001
Frequency	$\pm 0.02\text{Hz}$	0.01Hz
THD	IEC 61000-4-7 Class II	0.001%
AO	$\pm 1.0\%$	-

### Dimensions and Installation

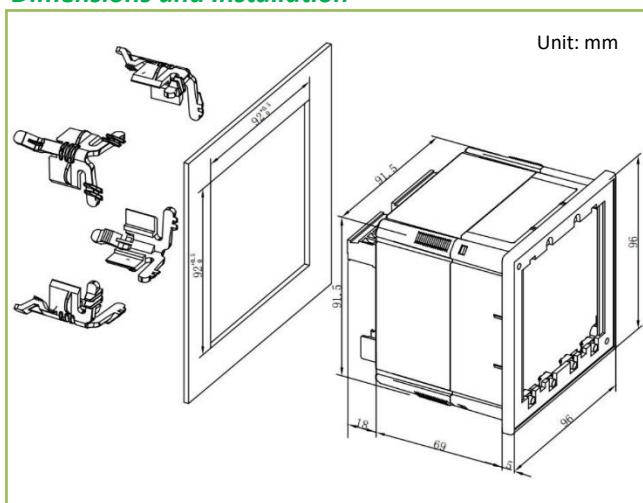

**Designed For Reliability**

**Manufactured To Last**



**Technical Specifications**




<b>Voltage Inputs (V1, V2, V3, VN)</b>	
Standard Un Range Overload	240ULN/415ULL 30V to 1.2Un 1.2xUn continuous 2xUn for 1s <0.02VA per phase @ 240ULN CAT III up to 300V
Burden Measurement Category	
Frequency	45-65Hz
<b>Current Inputs (I11, I12, I21, I22, I31, I32)</b>	
Standard In Range Starting Current Overload	5A (Optional 1A) 0.1% to 120% In 0.1% In 1.2xIn continuous 10xIn for 1s <0.25VA per phase @ 5A
Burden	
<b>Power Supply (L+, N-)</b>	
Standard Burden Overvoltage Category	95-250VAC/DC, ±10%, 47-440Hz <2W OVC III up to 300V
<b>Digital Inputs (DI1, DI2, DI3, DI4, DIC)</b>	
Type Sampling Hysteresis	Dry contact, 24VDC internally wetted 1000Hz 1ms minimum
<b>Digital Outputs (DO11, DO12, DO21, DO22)</b>	
Type Loading Load Type	Form A Mechanical Relay 5A @ 250VAC or 30VDC Resistive
<b>Pulse Output (E+, E-)</b>	
Type Isolation Pulse Width Max. Load Voltage Max. Forward Current	Form A Solid-State Relay Optical 80ms±20ms 50VDC 50mA
<b>Optional Analog Output</b>	
Type Loading Overload	0/4-20 mA 500Ω maximum 24mA maximum
<b>Installation Torque</b>	
Power Supply, U/I Inputs, RS-485 and I/O	5lb-in (0.5N.m)
<b>Environmental Conditions</b>	
Operating Temp. Storage Temp. Humidity Atmospheric Pressure Altitude Pollution Degree	-25°C to 70°C -40°C to 85°C 5% to 95% non-condensing 70 kPa to 106 kPa < 3000m 2
<b>Mechanical Characteristics</b>	
Panel Cutout Unit Dimensions LCD Display Dimensions IP Rating	92x92mm (3.62"x3.62") 96x96x92mm 61x61mm IP65

**Standards of Compliance**

<b>Safety Requirements</b>	
CE LVD 2014 / 35 / EU	EN 61010-1: 2010 EN 61010-2-030: 2010
Electrical Safety in Low Voltage Distribution Systems up to 1000Vac and 1500 Vdc	IEC 61557-12: 2018 (PMD)
Insulation	IEC 62052-11: 2003 IEC 62053-22: 2003
<b>Electromagnetic Compatibility</b>	
<b>CE EMC Directive 2014 / 30 / EU (EN 61326: 2013)</b>	
<b>Immunity Tests</b>	
Electrostatic Discharge	EN 61000-4-2: 2009
Radiated Fields	EN 61000-4-3: 2006 + A1: 2008+A2: 2010
Fast Transients	EN 61000-4-4: 2012
Surges	EN 61000-4-5: 2014 + A1: 2017
Conducted Disturbances	EN 61000-4-6: 2014
Magnetic Fields	EN 61000-4-8: 2010
Voltage Dips and Interruptions	EN 61000-4-11: 2004 + A1: 2017
Ring Wave	EN 61000-4-12: 2017
<b>Emission Tests</b>	
Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment	EN 55011: 2016
Electromagnetic Compatibility of Multimedia Equipment - Emission Requirements	EN 55032: 2015
Limits for Harmonic Current Emissions for Equipment with Rated Current ≤16 A	EN 61000-3-2: 2014
Limitation of Voltage Fluctuations and Flicker in Low-Voltage Supply Systems for Equipment with Rated Current ≤16 A	EN 61000-3-3: 2013
Emission Standard for Industrial Environments	EN 61000-6-4: 2007 + A1: 2011
<b>Mechanical Tests</b>	
Spring Hammer Test	IEC 62052-11: 2003
Vibration Test	IEC 62052-11: 2003
Shock Test	IEC 62052-11: 2003




Typical Wiring Diagrams

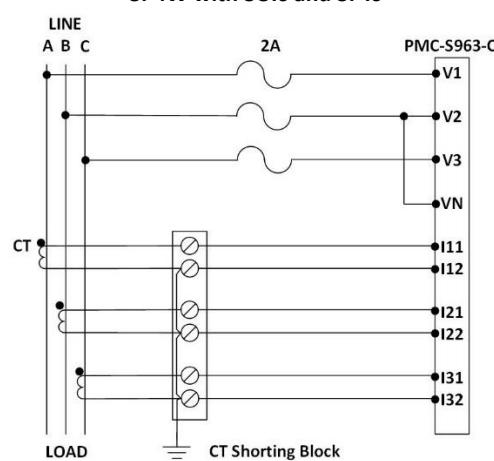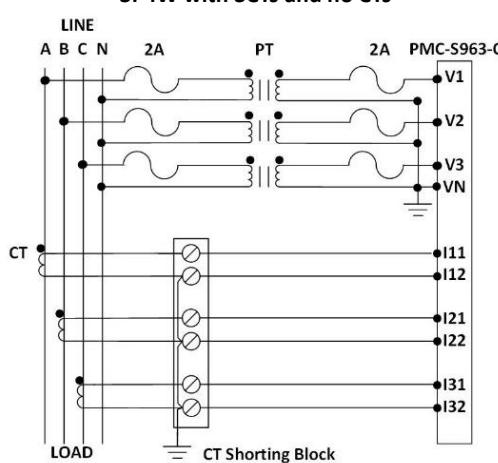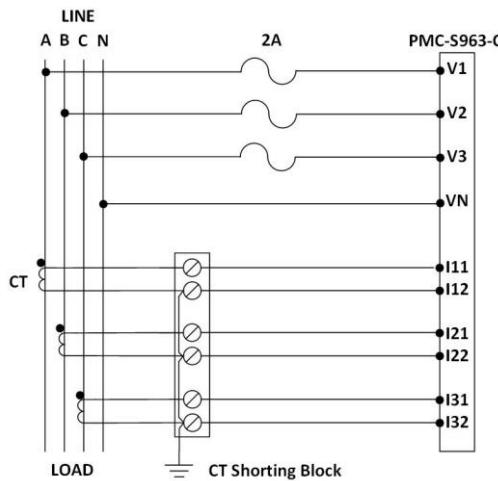

Notes: PMC-S963-C does not support 3P3W connection with open Vn.

Rear Panel

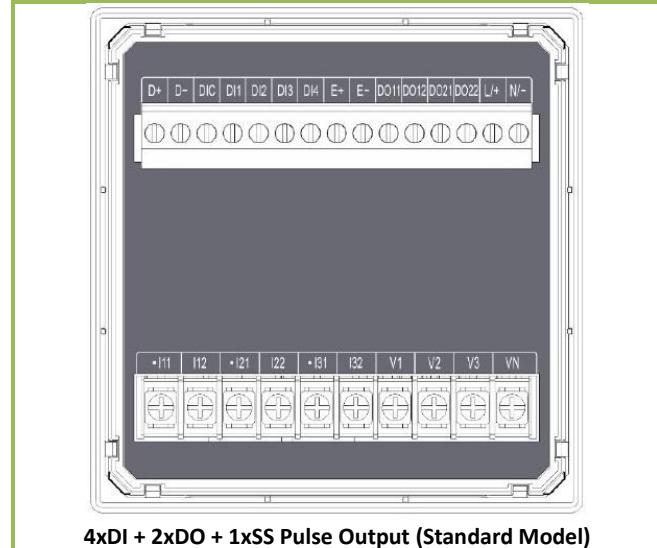

Ordering Information



Version 20231008

Product Code	Description
PMC-S963 Intelligent Multifunction Meter	
<b>Basic Function</b>	
C	DIN96 Panel Mounting with Large 7-Segment LCD display. Multifunction Measurements, Demands, Multi-Tariff TOU, Harmonics up to 31 <sup>st</sup> order
<b>Input Current</b>	
5	5A
1	1A
<b>Input Voltage</b>	
3	240ULN/415ULL
<b>Power Supply</b>	
2	95-250 VAC/DC, 47-440Hz
<b>Frequency</b>	
5	45-65Hz
<b>I/O</b>	
A	4xDI + 2xDO + 1xSS Pulse Output
B	4xDI
C	4xDI + 2xDO + 1xSS Pulse Output + 1xAO
<b>Communication</b>	
A	1xRS-485
<b>Language</b>	
E	English
PMC-S963 - C 5 3 2 5 A A E	PMC-S963-C5325AAE (Standard Model)

Your Local Representative