


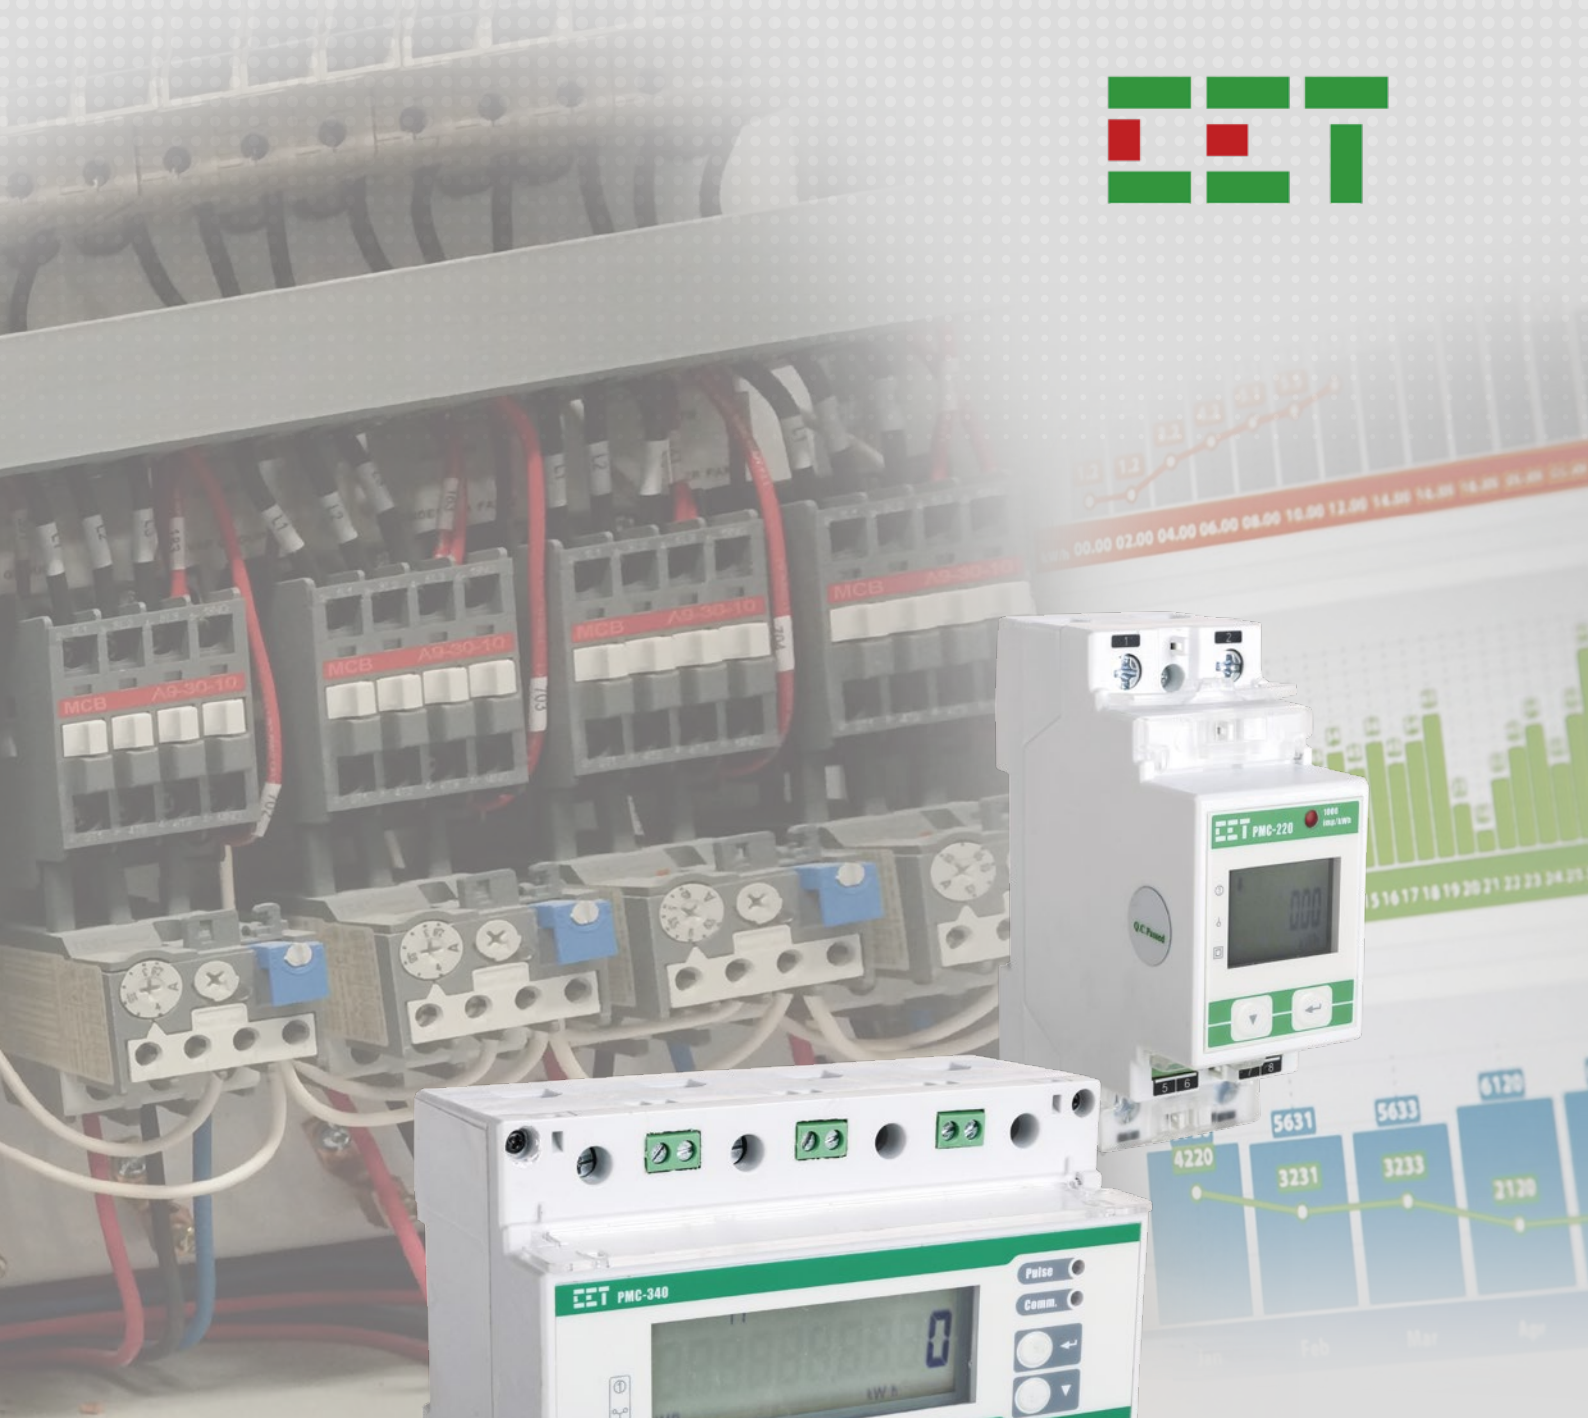

Multifunction Energy Meter


For Industrial & Commercial Metering

Multifunction Direct Connection Energy Meter High Accuracy


PMC-340 and PMC-220 are CET's latest offers for the low voltage energy metering market featuring DIN Rail mount, high accuracy, multifunction measurements and a large, easy to read LCD display. The PMC-340 provides 3-Ø multifunction measurements with 100A Direct Input or 5A CT Input and optional Digital Inputs for status monitoring or pulse counting for WAGES information. The PMC-220 is designed for low cost 1-Ø multifunction measurement with Direct Input up to 63A. Both PMC-340 and PMC-220 come standard with an RS-485 port, a front panel LCD as well as a Solid State Relay Output for energy pulsing. In addition, both devices have received the Certificate of Approval from the National Measurement Institute (NMI) of Australia and been verified by UL with reference to NMI M6-1 Electricity Meters, Part 1: Metrological and Technical Requirements.



PMC-340

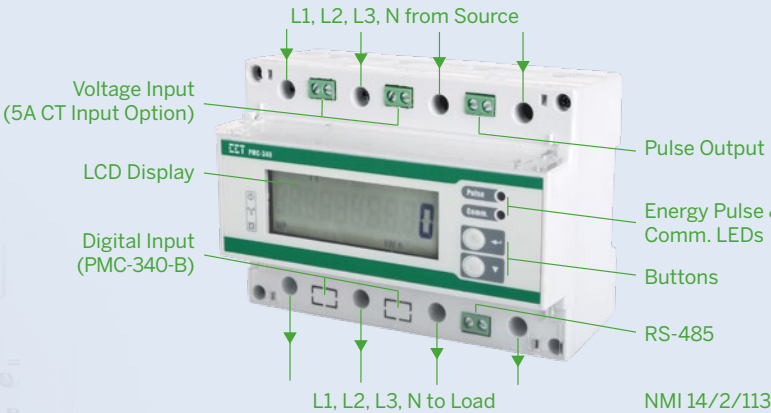

PMC-220

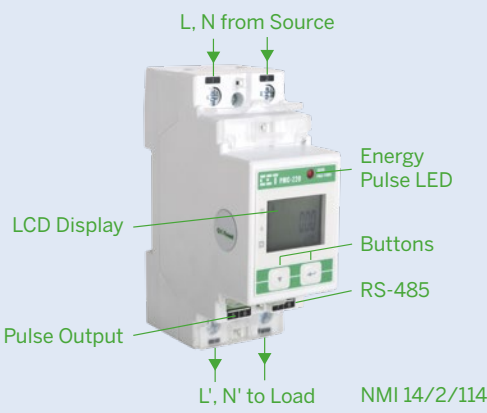


Typical Applications

- DIN-Rail mount energy metering
- Industrial and commercial metering
- Substation, building and factory automation
- Sub-metering
- Harmonic monitoring (PMC-340)



Dimension

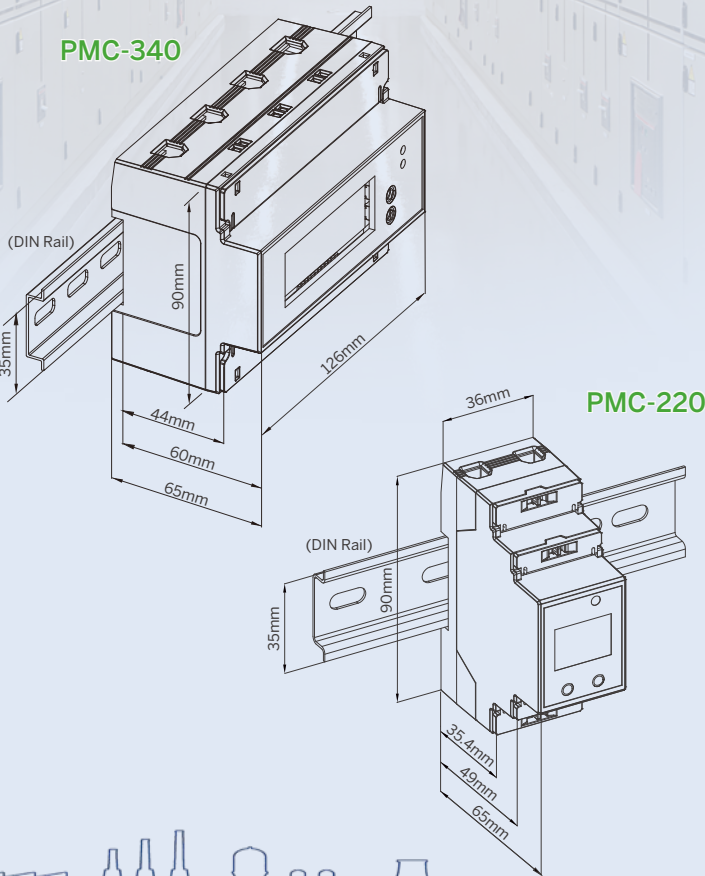

Features

	3-Ø PMC-340	1-Ø PMC-220
Meter Type	Three-Phase Multifunction Energy Meter	Single-Phase Multifunction Energy Meter
Dimensions	126x90x65mm	36x90x65mm
Accuracy	IEC62053-21: 2020 Class 0.5 (100A) and IEC62053-22: 2020 Class 0.5S (5A CT)	IEC62053-21: 2020 Class 0.5
Current Input	100A Direct Input and 5A CT Input	63A Direct Input
Power Supply	Self-powered, no external control power required	Self-powered, no external control power required
Display	Large, Easy to read LCD	8-digit Multifunction LCD
LED Indicator	Two LED indicators for energy pulsing and communication status	kWh LED Pulse Output
Solid State O/P	1 Solid State Energy Pulse Output	1 Solid State Energy Pulse Output
Communication	Standard RS-485 port with Modbus RTU support	Standard RS-485 port with Modbus RTU support
Digital Input	3 Optional DIs for status monitoring, pulse counting or tariff switching	/
Access	Password Protected	Password Protected
Integration	Easy integration into other Automation or SCADA systems	Easy integration into other Automation or SCADA systems

Measurements

	PMC-340	PMC-220
U/I, Power, PF, Freq.	Voltage, Current, P, Q, S, PF and Frequency	Voltage, Current, P, Q, S, PF and Frequency
Energy	Per phase and Total kWh and kvarh Imp/Exp/Tot/Net and kVAh	Total kWh and kvarh Imp/Exp/Tot/Net and kVAh
Harmonics	THD, TOHD, TEHD and Individual up to 31 st	/
Demand	Ia, Ib, Ic, P/Q/S Total Demands and Max. Demands	/
Max./Min.	Max./Min. Log	/
Data Recorder	16 measurements @ 10-minute intervals for 197 days	/
TOU	2 TOU Schedules and Monthly Energy Log of kwh/kvarh/kVAh	/
SOE	16 SOE events time-stamped to 1ms resolution	/

Accuracy

	3-Ø PMC-340		1-Ø PMC-220	
	Accuracy	Resolution	Accuracy	Resolution
Voltage (U)	±0.2%	0.01V	±0.5%	0.1V
Current (I)	±0.2%	0.001A	±0.5%	0.001A
P, Q, S	±0.5%	0.01kX	±1.0%	0.001kX
kWh kVAh	IEC62053-21: 2020 Class 0.5 for 100A Direct Input	0.1kXh (PMC-340-A)	IEC62053-21: 2020 Class 0.5 NMI M6-1 Class 1	0.01kXh
	IEC62053-22: 2020 Class 0.5S for 5A CT Input	0.01kXh (PMC-340-B)	IEC62053-21: 2020 Class 0.5	0.01kVAh
kvarh	IEC62053-23: 2020 Class 2	0.01kvarh	IEC62053-23: 2020 Class 2	0.01kvarh
PF	±1.0%	0.001	±1.0%	0.001
Frequency	±0.02 Hz	0.001Hz	±0.02 Hz	0.01Hz
Harmonics	IEC61000-4-7 Class II	0.1%	/	/

Technical Specifications

		3-Ø PMC-340	1-Ø PMC-220
Voltage (Un)		220-240VLN	220-240VLN
Overrange (% Un)		110%-120%	110%-120%
Range (V)		168 to 264VAC	95-264VAC
Burden		<10VA/phase	<0.5VA
Direct Input	Current (Ib/Imax)	20A/100A	5A/63A
	Range	0.4% Ib to Imax	/
	Starting Current (Ist)	0.4% Ib (0.08A)	0.4% Ib (0.02A)
	Minimum Current (Imin)	5% Ib (1A)	5% Ib (0.25A)
	Burden	<4VA/phase	<2VA
	Power Supply	Self-powered 168 to 264VAC	Self-powered 95-264VAC
	Maximum Wire Size	35mm² (3AWG)	25mm² (4AWG)
	Maximum Torque	2.5 N.m	2.5 N.m
CT Input	Current (In/Imax)	5A/6A	/
	Range	(0.1%-120%) In	/
	Starting Current (Ist)	0.1% In (5mA)	/
	Burden	<0.5VA/phase	/
Frequency		45-65Hz	45-65Hz

SS Pulse Output

Pulse Constant	1/10/100/500*/1000 /3200/5000* imp/kWh (imp/kvarh)	1000 imp/kWh or imp/kvarh
Isolation	Optical	Optical
Max. Load Voltage	80V	80V
Max. Forward Current	50mA	50mA
Pulse Width	60-150ms (PMC-340-A) 30-150ms (PMC-340-B)	60-100ms

*Available in PMC-340-B with Firmware V1.00.03 and Protocol V1.4 or later

Communications

RS-485	Modbus RTU	Modbus RTU
Baud Rate	1200/2400/4800/9600/19200 bps	1200/2400/4800/9600/19200 bps
Maximum Wire Size	1.5mm² (16AWG)	1.5mm² (16AWG)
Maximum Torque	0.45 N.m	0.45 N.m

Environmental and Mechanical Specifications

Environmental Conditions	
Operating Temp.	-25°C to 70°C
Storage Temp.	-40°C to 85°C
Humidity	5% to 95% non-condensing
Atmospheric Pressure	70kPa to 106kPa
Pollution Degree	2

Mechanical Characteristics		
-	PMC-340	PMC-220
Mounting	DIN Rail	
Unit Dimensions	126x90x65mm	36x90x65mm
Shipping Dimensions	165x140x110mm	120x103x42mm
Shipping Weight	0.68kg	0.18kg
IP Rating	IP51 (Front), IP30 (Body)	

Mechanical Tests	
Vibration Test	IEC62052-11: 2020
Shock Test	IEC62052-11: 2020
Spring Hammer Test	IEC62052-31: 2015

Revenue Metering Approval		
PMC-340	NMI M6-1 of Australia	Approval Mark: NMI 14/2/113
PMC-220	NMI M6-1 of Australia	Approval Mark: NMI 14/2/114

EMC Compatibility

CE EMC Directive 2014/30/EU (EN61326: 2013)

Immunity Tests	
Electrostatic Discharge	EN61000-4-2: 2009
Radiated Fields	EN61000-4-3: 2006 + A1: 2008 + A2: 2010
Fast Transients	EN61000-4-4: 2012
Surges	EN61000-4-5: 2014 + A1: 2017
Conducted Disturbances	EN61000-4-6: 2014
Magnetic Fields	EN61000-4-8: 2010
Voltage Dips and Interruptions	EN61000-4-11: 2004 + A1: 2017
Ring Wave	EN61000-4-12: 2017

Emission Tests	
Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment	EN55011: 2009 + A1: 2010 (CISPR 11)
Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	EN55022: 2010 + AC: 2011 (CISPR 22)
Limits for Harmonic Current Emissions for Equipment with Rated Current ≤ 16A	EN61000-3-2: 2014
Limitation of Voltage Fluctuations and Flicker in Low-Voltage Supply Systems for Equipment with Rated Current ≤ 16A	EN61000-3-3: 2013
Emission Standard for Industrial Environments	EN61000-6-4: 2007 + A1: 2011

Safety Standards

Safety Requirements	
CE LVD 2014/35/EU	EN61010-1: 2010 + A1: 2019 EN61010-2-030: 2010
Insulation (Indoor Use) AC Voltage Impulse Voltage	IEC62052-31: 2015 AS 62052.31: 2017 + A1: 2021 NMI M6-1 (PMC-340-B, PMC-220) 4kV @ 1 minute 12kV+0%, -15%, 1.2/50µs (NMI M6-1)
Electrical Safety in Low Voltage Distribution Systems up to 1000Vac and 1500Vdc	IEC61557-12: 2021 (PMD)

Ordering Information

Product Code		Description
PMC-340 Digital Three-Phase Multifunction Energy Meter		
Basic Function	A	Basic Model
	B*	Model A + 3xDI + 2MB Log Memory
Input Current	A	20A (100A Max.), Direct Input
	B	5A (6A), CT Input
Input Voltage	3	240V LN/415V LL
Frequency	5	45Hz-65Hz
Reserved	X	None
Communications	A	1xRS-485
Language	E	English
PMC-340	- A A 3 5 X A E	PMC-340-AA35XAE (Standard Model)

Product Code		Description
PMC-220 Digital Single-Phase Multifunction Energy Meter		
Input Current	C	5A (63A Max.), Direct Input
Input Voltage	3	95V-240V AC±10%
Frequency	5	45Hz-65Hz
Communications	A	1xRS-485
Language	E	English
PMC-220	- C 3 5 A E	PMC-220-C35AE (Standard Model)

* Additional charges apply

Email: sales@cet-global.com
Website: www.cet-global.com

Copyright © CET Inc. All rights reserved.

Your Local Representative

V.02 17/01.2025