



PMC-690A

Hand-Held Power Quality Analyzer

PMC-690A



PMC-690A is the most advanced and user-friendly Power Quality Analyzer for performing not only ad-hoc real-time monitoring and accurate data recording but also sophisticated Power Quality diagnosis and investigation at site as it combine Class 0.1 accuracy and optimal PQ functions in a Portable, Lightweight and handheld form factor, standard equipped with a 11" Android Tablet with pre-installed and fully functional App for viewing RMS data, Waveforms and recorded Logs as well as configurations setup. The PMC-690A complies with standards as IEC 62053-22 Class 0.5S, IEC 61000-4-30 Ed. 3.1 Class A, IEC 61000-4-15, IEC 61000-4-7, EN 50160, IEEE Std 519-2022. Furthermore, the PMC-690A comes with 4xAC/DC Voltage Channel and 4xCurrent (3xAC + 1xAC/DC) Channel, dual 10/100/1000BaseT Ethernet ports, 1xBuilt-in full band 4G LTE modem and 1x802.11n Wi-Fi Module for Station and Access Point modes to connect with Internet or the tablet. In addition, it offers 2xDI, 1xSS Pulse Output and 1xAUX Analog DC Input for 2xDC Voltage and 2xDC Current channel.

Typical Applications

Utility

- PQ Check-up at HV, MV & LV Utility Substations
- Site Investigation & Diagnosis for PQ problems

Industrial and Commercial

- Electrical Testing and Recording
- Fault Investigation and Identification
- No Load and Full Load Test
- Mains and Critical Feeder Dips, Swells, Transients, Flicker and Disturbance Monitoring
- 400Hz line measurement for use in avionics and shipboard

Basic Features

- IEC 62053-22 Class 0.5S kWh metering
- True RMS @ 2048 samples/cycle sampling
- AC/DC Input Measurement with Split Core Current Clamps or Rogowski Coils
- Intuitive Interface and simple configurations
- Replaceable Lithium Battery for 8-hour runtime
- 128GB on-board eMMC and optional 512GB TF card for Log memory
- Industrial-grade, 2.3" Backlit Color TFT LCD @ 320x240
- SNTP, IEEE 1588, IRIG-B/GPS 1PPS Input and GNSS Time Sync. (GNSS Antenna ordered separately)

Power Quality Features

- IEC 61000-4-30 Ed. 3.1 Class A compliant
- EN 50160 and IEEE Std 519-2022 Reporting
- Dips, Swells, Interruptions, Transients, Rapid Voltage Change, Inrush Current, Mains Signalling Voltage and Flickers monitoring
- Real-time Waveform Capture (WFC), Waveform Recording (WFR) & Disturbance Waveform Recording (DWR) in COMTRADE File format
- Disturbance Direction Indicator for Dips, Swells and Interruptions
- Statistical Data Recording and ½ cycle RMS Recording

PQ Monitor (HD App on Tablet)

- True RMS Real-time, Harmonics, Power and Energy Measurements
- Phasor Diagram, Harmonics & Interharmonics Histogram, 2kHz-150kHz C.E.
- Real-time WFC of 3-phase U & I @ 128 samples/cycle x 4 cycles
- Event WF Display @ max. 2048 samples/cycle & ITIC/SEMI F47 Curves
- Trend Curves for DR and SDR Logs
- Max. & Min. Logs
- Deviation, Sequence Components & Unbalance
- Device Logs, SOE Logs, PQ Counters and I/O Status
- Device Configuration and Diagnostics

Metering

Basic Measurements (1-second update)

- 3-phase U, I, P, Q, S and PF as well as U4, I4 (Measured Neutral Current) and Frequency

Energy

- Per-phase kWh, kvarh Import/Export/Net/Total and kVAh Total
- Total RMS kWh, kvarh Import/Export/Net/Total and kVAh Total
- Total Fundamental kWh, kvarh Import/Export/Net/Total
- Total Harmonic kWh, kvarh Import/Export/Net/Total and Harmonic kWh, kvarh Import/Export from 2nd to 63rd

Hand-Held Power

Power Quality Metering

PQ Parameters as per IEC 61000-4-30 Ed. 3.1 Class A Compliant

- Power Frequency
- Magnitude of the Supply Voltage
- Flicker
- Supply Voltage Interruptions, Dips and Swells
- Transient Voltages
- Supply Voltage Unbalance
- Voltage Harmonics and Interharmonics
- Mains Signalling Voltage on the Supply Voltage
- Rapid Voltage Change
- Measurement of Over Deviation and Under Deviation Parameters
- Magnitude of Current
- Current Harmonics and Interharmonics
- Current Unbalance
- 2kHz to 150kHz Conducted Emission Measurements

Harmonic and Interharmonic Measurements

- U and I THD, TOHD, TEHD, TIHD, TOIHD, TEIHD and TH (RMS)
- Current TDD, TDD Odd and TDD Even
- U and I Individual Harmonics (%HD and RMS) from 2nd to 63rd#
- K-Factor for Current, Crest Factor for Current and Voltage
- U and I Individual Interharmonics (%IHD and RMS) from 1st to 63rd#
- Fundamental U, I, P, Q, S Phase Angle and Displacement PF
- Harmonic Phase Angle from 2nd to 63rd
- U and I DC Components
- Real-time U and I Harmonic Components (RMS) from 5Hz to 3150Hz

%HD and %IHD can be configured as % of Fundamental, % of U/I nominal or % of RMS

Sequence and Unbalance

- Zero, Positive and Negative Sequence Components
- U and I Unbalance based on Zero and Negative Sequence Components

Dips, Swells, Interruptions Recording

- Dips, Swells and Interruptions detection @ 10ms (½ cycle at 50Hz)
- Trigger for SOE Log, DR, WFR, DWR, RMSR and iTrigger
- Display of Event specific WFR, DWR and/or RMSR as well as the associated ITIC/SEMI F47 plot on PQ Monitor app

Rapid Voltage Change (RVC)

- Detection of a quick transition in RMS Voltage between two steady-states

Inrush Current Monitoring

- Monitoring of the ½ cycle RMS Current and capturing of the Current waveforms associated with events such as motor starting and transformer being energized

PQ Event Counters

- Dips, Swells, Interruptions, Transients, Rapid Voltage Change, Inrush Currents, Mains Signalling Voltages and Total PQ Event Counters during monitoring period

Transients Recording

- Standard transients capture as short as 10µs @ 50Hz or 8.33µs @ 60Hz for sub-cycle disturbances such as capacitor switching and resonance phenomena
- 2MHz sampling capacity for 0.5µs high-speed Transients detection and synchronous waveform recording
- Trigger for SOE Log, WFR, DWR, RMSR and iTrigger
- Display of Event specific WFR, DWR and/or RMSR on PQ Monitor app

Disturbance Direction Indicator

- Determine if a PQ Event is located upstream or downstream
- Pinpoint if the cause of the event is external or internal

Setpoints

PQ Setpoints

- Transients, Dips, Swells, Interruptions, Rapid Voltage Change, Inrush Current
- Trigger DR, SOE Log, WFR, DWR, RMSR and iTrigger

Control Setpoint

- 40 Control Setpoints can be configured with extensive monitoring sources including U, I, Freq., P, Q, S, PF, Harmonics, Unbalances, Deviations, Flickers, Phase Reversal/Loss, AI and etc.
- Configurable thresholds and time delays
- Trigger DR, SOE Log, WFR, DWR, RMSR and iTrigger

Digital Input Setpoint

- Provides Control Output Actions in response to changes in DI status
- Trigger DR, SOE Log, WFR, DWR, RMSR and iTrigger

Data and Event Recorders

Non-Volatile Log Memory

- 128GB on-board eMMC and optional 512GB TF card for Log memory

SOE Log

- Max. 1024 events per day on the basis of FIFO
- Time-stamped to ±1ms resolution
- Setpoint event, I/O operation, Dips, Swells, Interruptions, Transients, Rapid Voltage Change, Inrush Current, Mains Signalling Voltage, iTrigger, etc.
- Record the characteristic data for Setpoint events as well as WFR, DWR, RMSR, ITIC and SEMI F47 Curve for PQ events
- Stop when monitoring period ends

Device Log

- Max. 1024 events per day on the basis of FIFO
- Time-stamped to ±1ms resolution
- Power On/Off, Setup changes, Time Sync., Device Operations and Self-diagnostics
- Stop when monitoring period ends

Quality Analyzer

Statistical Data Recorder (SDR)

- Recording of the Max., Min., Avg. and 95th percentile values for all retrievable measurement with a 150-cycle integration interval on the basis of FIFO
- Recording Interval from 1 to 60 minutes
- Logging sessions and period depending on user configuration
- Downloadable via PQ Monitor app or iPQ Software

Data Recorder (DR)

- Recording of max. 512 parameters on the basis of FIFO
- Configurable Recording Offset and Interval from 1s to 1 day
- Logging sessions and period depending on user requirements

Trend Curve for SDR and DR

- Trend display of recorded SDR and DR parameters at selectable interval via PQ Monitor app
- Ability to export the logs in tabular form

Max./Min. Recorder (MMR)

- 4 Max./Min. Recorders of 80 parameters each
- Metering for RMS/Fundamental/Harmonic/Interharmonic Measurements, Deviations, Unbalances and Flicker during monitoring period

Interval Energy Recorder (IER) and Accumulative Energy Recorder (AER)

- Both IER Log and AER Log support the recording of per-phase and Total RMS kWh, kvarh Import/Export/Total/Net and kVAh Total, Total Fundamental and Total Harmonic kWh, kvarh Import/Export during monitoring period
- Recording Interval from 1 minute to 65,535 minutes
- Max. Recording Depth @ 65,535 records for each group
- Stop when monitoring period ends

Harmonic Components Recording

- 3 groups recording of 20 consecutive Voltage/Current Harmonic Components with 5Hz bins resolution
- Stop when monitoring period ends

Real-Time Waveform Capture (WFC) and Waveform Recorder (WFR)

- Real-time WF Capture @ 128 samples/cycle x 4 cycles
- Max. 1500 entries per day on the basis of FIFO
- Simultaneous capture of 4-phase Voltage and 4-phase Current Inputs
- (Range of Cycles) x Samples/Cycles with programmable pre-fault and post-fault cycles: (40-200) x 2048, (40-400) x 1024, (40-800) x 512, (40-1600) x 256, (40-3200) x 128
- Scheduled WFR with max. repetition of 10,000 times and programmable schedule from 1 to 960 hours
- Continuous Waveform Recording during monitoring period @ 128 samples/cycle stored in TF card (~13GB/day) on the basis of stop-when-full mode
- 2M samples/second Waveform Recording for High-speed Transient capture with max. 100 entries per day on the basis of FIFO
- COMTRADE file format, downloadable through PQ Monitor App

Disturbance Waveform Recorder (DWR)

- Max. 1500 entries per day on the basis of FIFO
- Logging sessions and period depending on user requirements
- Simultaneous recording of all Voltage (U1-U4) and Current (I1-I4) Inputs
 - Initial Fault: 35 cycles @ 512 samples/cycle
 - Extended Fault: Up to 150 cycles @ 16 samples/cycle
 - Steady State: Up to 360s of 1-cycle absolute peak values
 - Post Fault: 15 cycles @ 512 samples/cycle

RMS Recorder (RMSR)

- Max. 1500 entries per day on the basis of FIFO
- 16 channels max., selectable U, I, P, Q, S, PF, Frequency, Freq. Deviation
- Recording Interval from 0.5 to 60 cycles
- Recording Width @ 7200 samples per parameter
- Configurable pre-fault samples from 100 to 500
- 72 seconds of ½ cycle RMS recording @ 50Hz or 60 seconds @ 60Hz

iTrigger

- Cross trigger SOE Log, WFR, DWR and RMSR with other iMeter devices within the same local area network (LAN)
- Group ID and MAC Address provided as the trigger source

IEEE Std 519-2022 Report

- 365 Daily Reports for statistical evaluations on Voltage and Current Harmonics based on 99th percentile very short time (3 s) values
- 52 Weekly Reports for statistical evaluations on Voltage Harmonics (95th percentile) and Current Harmonics (95th and 99th percentile) short time (10 min) values
- Programmable settings for Report Mode, PCC Voltage, Max. Short Circuit Current, etc.

Inputs and Outputs

Digital Inputs

- 2 channels, volts free dry contact, 24VDC internally wetted
- 1000Hz sampling for status monitoring with programmable debounce
- Pulse counting with programmable weight for each channel for collecting WAGES (Water, Air, Gas, Electricity, Steam) information

SS Pulse Outputs

- Standard 2 channels Solid State Relays for Energy Pulsing applications

Auxiliary Analog Inputs

- 2xVoltage(0-10VDC) and 2xCURRENT (0/4-20mA DC) channels with user programmable displayed units

Communications

Ethernet Port (P1, P2)

- Dual 10/100/1000BaseT Ethernet Ports with RJ45 connector

PMC-690A

Wi-Fi Module

- 802.11n Wi-Fi support configurable access point mode (connect to tablet) or station mode (connect to Internet)

4G

- Built-in 4G LTE CAT4 modem supports MQTT protocol
- Uplink speed: max. 50Mbps, Downlink speed: max. 150Mbps
- Certified Carrier including Deutsche Telecom, Verizon, AT&T, Sprint, US Cellular, T-Mobile, Telus, Rogers and etc.
- Frequency bands supported:
 - 4G LTE: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28/B38/B39/B40/B41
 - 3G UMTS: B1/B2/B4/B5/B6/B8/B19
 - 2G GSM: B2/B3/B5/B8

USB Port

- USB 2.0 type A port for USB flash drive to transfer data and for tablet auxiliary power supply and communications
- USB 2.0 type C port for data downloaded to PC

Time Synchronization

- Battery-backed Real-time clock @ 6ppm ($\leq 0.5s/day$)
- Time Sync. with auto-selection among Modbus RTU, GNSS Receiver, SNTP, IEEE 1588 and GPS 1PPS/IRIG-B


System Integration

PQ Monitor Application (Pre-installed HD App on Tablet)

- The PMC-690A is supported by CET's PQ Monitor (HD App).
- The PQ Monitor supports
 - Intuitive display of Real-time Measurement and Historical Monitoring Record
 - Management for Monitoring Record
 - Graphic (Waveform, ITIC and SEMI F47 and Trend Curve) analysis for the measurements
 - Export for IER, AER, DR and SDR Logs as well as EN50160, IEEE Std 519-2022 and user-defined reports
 - Templated Configuration for all Setup parameters

iPQ Explore

- Compact, password protected, free Windows software for simultaneous connection to multiple Power Quality Analyzers
- Support configuration of all Setup parameters
- Display Real-time Measurements, PQ Events and Waveform Analysis
- Trend display of recorded DR, SDR, IER and AER
- Ability to export trend curve in PNG format and log in tabular format
- Generation of EN 50160 and IEEE Std 519-2022 Reports in Excel and PDF format

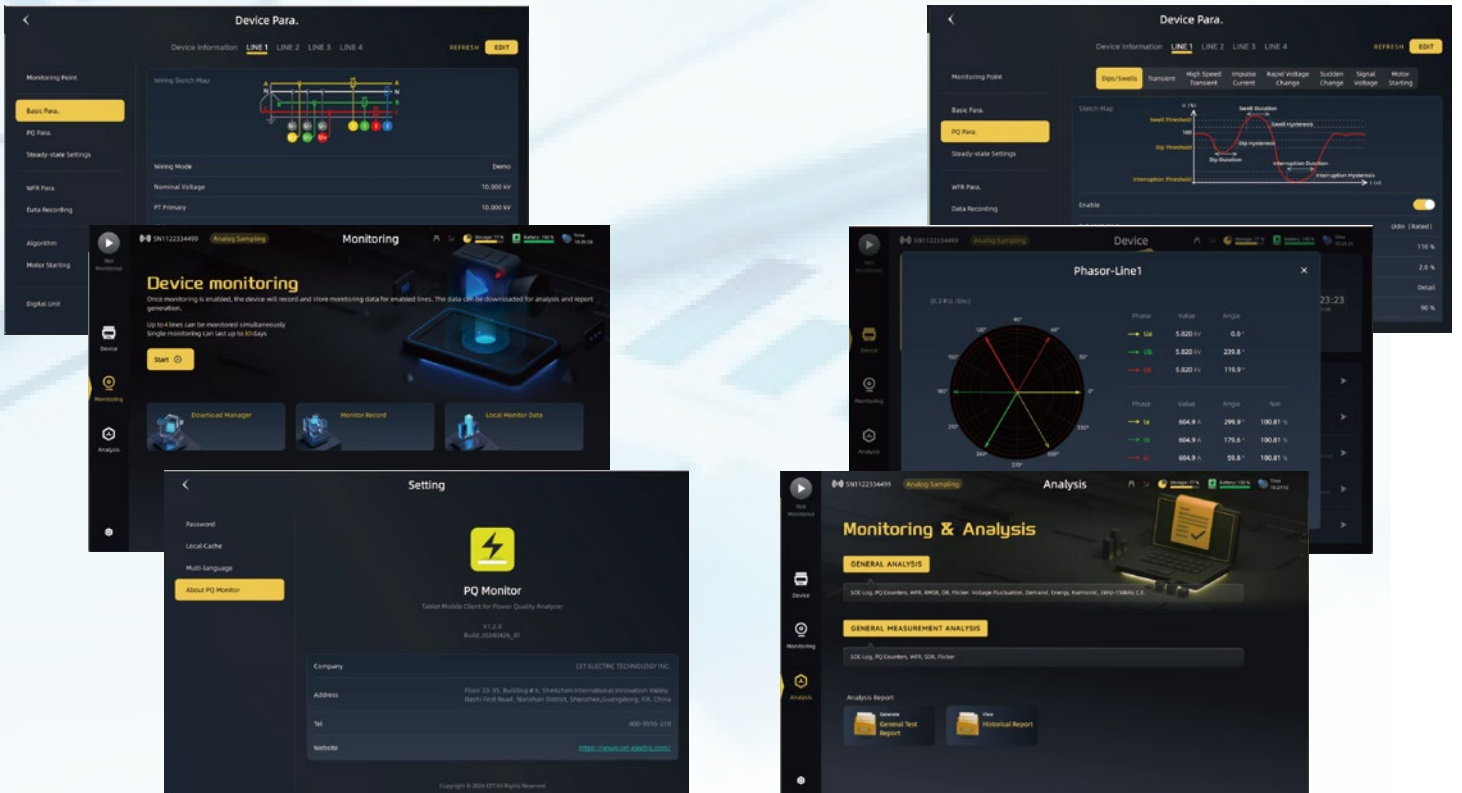

Accuracy

Parameters	Accuracy	Resolution
Voltage (U)	±0.1%	0.001V
I1, I2, I3, I4	±0.1% + Error of SCCP/Rogowski Coil	0.001A
kW/kvar/kVA	±0.2% + Error of SCCP/Rogowski Coil	0.001kX
kWh, kVAh	IEC 62053-22 Class 0.5S	0.001k
kvarh	IEC 62053-24 Class 0.5S	0.001k
Phase Angle	±2°	0.1°
Freq., Freq. Deviation	±0.001Hz	0.001Hz
Harmonics, Interharmonics	IEC 61000-4-7 Class I	0.01%
U Unbalance	±0.1%	0.01%
I Unbalance	±0.5%	0.01%
Pst, Plt	IEC 61000-4-15 Class F1	0.001
Analog Input	±0.5%	0.001

Note: The accuracy will be different under 400Hz line measurement. Please contact CET for more information.

Technical Specifications

Voltage Inputs ~ (CH1, CH2, CH3, CH4)

Standard (Un)	400VLN/690VLL + 20%
Range	5-1000Vrms or 5-1000VDC
Starting Voltage	4V
Overload	1000Vrms continuous, 2500Vpk for 1s
Burden	< 0.1VA/per phase
PT Ratio	-
Primary	1-1,000,000V
Secondary	1-1,500V
Measurement Category	CAT IV 600V, CAT III 1000V
Resolution	18-bit A/D
Frequency	40-72Hz, 320-480Hz (400Hz system)

High-speed Voltage Transients

Range	±4kV
Sampling Rate	2MHz
Resolution	14-bit A/D
Trigger	Adjustable threshold x Un (%)

Current Inputs (CH1~, CH2~, CH3~, CH4~) via SCCP/Rogowski Coil

CH1, CH2 and CH3 Input (In)	0-500mV from SCCP/Rogowski Coil
PMC-SCCP-50A-500mV-L-A-B	AC 5A/50A
PMC-SCCP-500A-500mV-L-B-B	AC 500A
PMC-SCCP-5kA-500mV-L-C-C-254	AC 500A/5kA
PMC-SCCP-5kA-500mV-L-C-C-371	AC 500A/5kA
CH4 Input	0-100mA from SCCP
PMC-SCCP-50A-20mA-L-X-B	AC/DC 50A
PMC-SCCP-500A-20mA-L-X-B	AC/DC 500A
CT Ratio	-
Primary	1-30,000A
Secondary	1-50A
I4 Primary	1-30,000A
I4 Secondary	1-50A

Power Supply (L/+, N/-)

Adapter Input	100-240VAC ± 10%, 50Hz/60Hz
Adapter Output	12VDC/5A
UPS	Replaceable Lithium battery (8-hour runtime, 10-hour charge time)

Digital Inputs (DIC, DI1, DI2)

Standard	Dry contact, 24VDC internally wetted
Sampling	1000Hz
Hysteresis	1ms minimum

GPS Input (CLK+, CLK-)

Accuracy	GPS/IRIG-B: < 1ms, IEEE 1588: < 1ms
----------	-------------------------------------

GNSS Time Sync. (ANT)

Connector Type	SMA Male
Reception Capability	GPS L1C/A
Accuracy	< 55us

Optional Solid State Pulse Outputs (E1+, E1-, E2+, E2-)

Type	Form A Solid State Relay
Isolation	Optical
Max. Load Voltage	30VDC
Max. Forward Current	100mA

Analog Input (AUX)

AI1/AI2 Type	0/4-20mA Current
AI3/AI4 Type	0-10VDC Voltage
Overload	24mA or 12VDC

Environmental Conditions

Operating Temperature	-10°C to 50°C
Storage Temperature	-40°C to 70°C
Humidity	5% to 95% non-condensing
Atmospheric Pressure	70 kPa to 106 kPa
Pollution Degree	2

Mechanical Characteristics

Unit Dimensions	324.4x233.5x73.8 mm
IP Rating	51

Standard of Compliance

Safety Requirements

CE LVD 2014/35/EU	EN 61010-1: 2010 + A1: 2019 EN IEC 61010-2-030: 2021
Electrical Safety in Low Voltage Distribution Systems up to 1000Vac and 1500 Vdc	IEC 61557-12: 2021 (PMD)
Insulation	IEC 62052-31: 2015 EN 61010-1: 2010 + A1: 2019
AC Voltage	2kV @ 1 minute
Insulation Resistance	>100MΩ
Impulse Voltage	6kV, 1.2/50μs

EMC Compatibility

CE EMC Directive 2014/30/EU (EN IEC 61326: 2021)

Immunity (EN50082-2)

Electrostatic Discharge	EN 61000-4-2: 2009
Radiated Fields	EN IEC 61000-4-3: 2020
Fast Transients	EN 61000-4-4: 2012
Surges	EN 61000-4-5: 2014 + A1: 2017
Conducted Disturbances	EN IEC 61000-4-6: 2023
Magnetic Fields	EN 61000-4-8: 2010
Voltage Dips and Interruptions	EN IEC 61000-4-11: 2020
Ring Wave	EN 61000-4-12: 2017

Emission (EN50081-2)

Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment	EN 55011: 2016 + A1: 2020
Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	EN 55032: 2015 + A1: 2020
Limits for Harmonic Current Emissions for Equipment with Rated Current ≤ 16 A	EN 61000-3-2: 2019
Limitation of Voltage Fluctuations and Flicker in Low-Voltage Supply Systems for Equipment with Rated Current ≤ 16 A	EN 61000-3-3: 2013
Emission Standard for Industrial Environments	EN IEC 61000-6-4: 2019

Mechanical Tests


Spring Hammer Test	IEC 62052-31: 2015
Vibration Test	IEC 62052-11: 2020
Shock Test	IEC 62052-11: 2020

Power Quality

Voltage Characteristics of Electricity Supplied by Public Distribution Systems	EN 50160: 2022
General Guide on Harmonics and Interharmonic Measurements and Instrumentation, for Power Supply Systems and Equipment Connected Thereto	IEC 61000-4-7: 2009
Flickermeter-Functional and Design Specifications	IEC 61000-4-15: 2010
Testing and Measurement Techniques-Power Quality Measurement Methods	IEC 61000-4-30: 2021 Ed. 3.1
Power Quality Measurement in Power Supply Systems-Part 2: Functional Tests and Uncertainty Requirements	IEC 62586-2: 2021 Ed. 2.1

Dimensions and Installation

Unit: mm

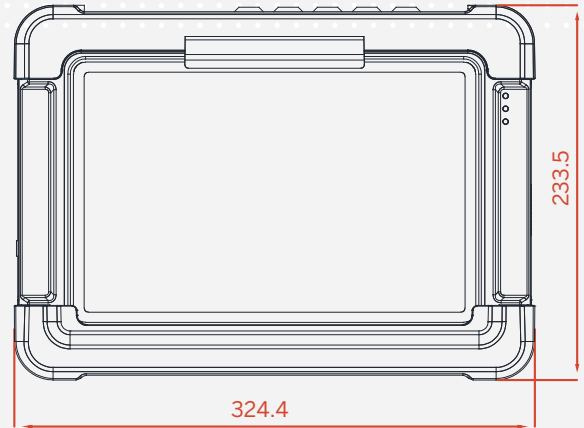

Ordering Information

Product Code

Appearance

PMC-690A Hand-Held Power Quality Analyzer

Description:	<p>PMC-690A-AAAE Main Unit The PMC-690A conforms to IEC 62053-22: 2020 Class 0.5S for active energy accuracy and IEC 61000-4-30 Ed.3.1 Class A for Power Quality Features. It comes with 4 Voltage Inputs (CAT IV600V/CAT III 1000V), 4 Current Inputs (500mv Max.), 2x 10/100/1000BaseT Ethernet Port, 1x USB 2.0 Type A and 1x USB 2.0 Type C Port, 1x IRIG-B/GPS 1PPS Time Input, 1x Built-in full band 4G LTE Modem, 1x Wi-Fi Module with 802.11n support for access point/station mode, 2x DI (internally wetted @ 24VDC), 2x SS Pulse Output, 1x replaceable Lithium Battery with 9-hour runtime. It comes with the following accessories in the package:</p>	
Standard Accessories	<p>60W AC Power Adapter for PMC-690A Main Unit: • Input: 100-240VAC, 50/60Hz • Output: 12VDC, 5A • AC Input Cord Length: 1m • DC Output Cord Length: 1.8m • Plug Type: Type I</p>	
	<p>11" Android Tablet with protective case, PQ Monitor app pre-installed</p>	
	<p>1x Waterproof Nylon Bag, 445x145x350mm (WxHxD)</p>	
Optional Accessories	Magnetic Mount GNSS Antenna	
PMC-690A	PMC-690A-AAAE (Standard Model)	


Interface & Terminal Diagram

- 1 Voltage Inputs
2 Current Inputs
3 AUX (Analog) Inputs
4 Chassis Ground




Top Interface

- Left Interface
Right Interface

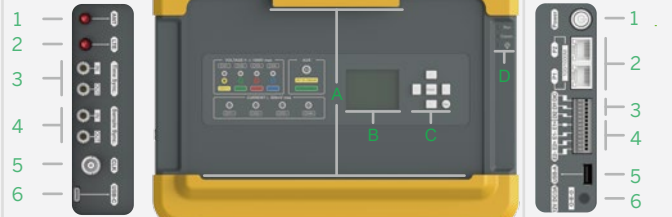

- 1 GNSS Antenna (SMA) Connector
2 4G LTE Antenna (SMA) Connector
3 Time Sync. Input/Output
4 Sample Sync. Input/Output
5 IRIG-B/GPS 1PPS Input
6 USB 2.0 Type C Connector
- A Brackets for Tablet
B TFT LCD Display
C Function Key
D LED Indicators
- 1 Power Button
2 10/100/1000BaseT Ethernet Ports
3 Solid State Pulse Outputs
4 Digital Inputs
5 USB 2.0 Type A Connector
6 Power Adapter Input

Typical Wiring Diagram

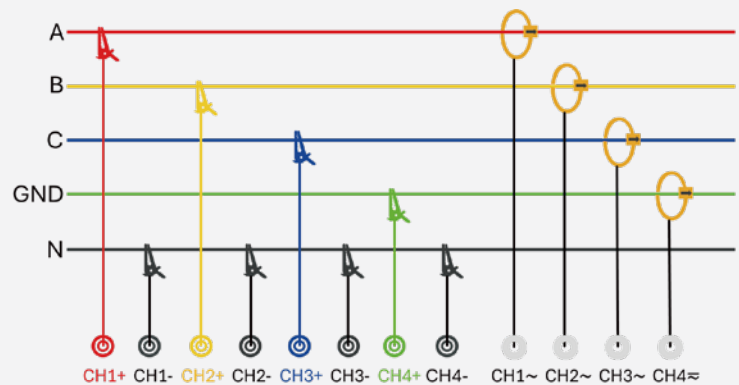

3P4W WYE Connection

*Please refer to Accessories for more information and order the desired model and quantity as a separate if necessary.

Accessories

Cables

Adapter Cable

1m adapter cable for BNC Male to Dual Alligator Clips-for IRIG-B/GPS 1PPS Input (Red for Positive Input, Black for Negative Input) Alligator Clip Jaw Opening: 10mm



Ethernet Cable

Two sets of 2m Flat CAT6 Ethernet cable with RJ45 connectors



ST Fiber Optic Jumper

Two sets of 3m ST Fiber Optic Jumper cable-for Sync. of Time/Sampling between interconnected PMC-690A



Adapter Cable

0.57m adapter cable for BNC Male to 4 pairs of Alligator Clips-for Auxiliary Analog DC Inputs-2xVoltage Input + 2xCurrent Input (Red for Positive Input, Black for Negative Input) Alligator Clip Jaw Opening: 10mm



Test Leads

Voltage Test Lead Sets

4-Phase (Va, Vb, Vc and V4N) Voltage Test Lead sets-color coordinated, safety shrouded, 4mm non-stackable Banana Plug on both ends of the leads, 3m length



Neutral Voltage Test Lead

4 sets of Neutral Voltage Test Lead-Black, safety shrouded, 4mm non-stackable Plug on both ends of the leads, 3m length



Test Lead

3 sets of Test Lead-Black, safety shrouded, 4mm stackable Banana Plug on both ends of the leads, 0.25m length



Test Lead

Test Lead-Blue, safety shrouded, 4mm non-stackable Banana Plug on both ends of the leads, 2m length



Optional CT Clamps

PMC-SCCP-50A-500mV-L-A-B, L=3m or 20m, Φ 15mm
In=AC 5A/50A, Max.Allowable Current=50A
Output=10mV/A (Max.500mv), Accuracy: \pm 0.3% rdg., \pm 0.02%f.s
Protection: CAT III 300V
Termination: Φ 14 Circular Push-Pull Connector



PMC-SCCP-50A-500mV-L-A-B, L=3m, Φ 8mm
In=AC 50A, Max.Allowable Current=50A
Output=10mV/A (Max.500mv), Accuracy: \pm 0.2% rdg., \pm 0.02%f.s
Protection: CAT III 300V
Termination: Φ 14 Circular Push-Pull Connector



PMC-SCCP-500A-500mV-L-B-B, L=3m, Φ 50mm
In=AC 500A, Max.Allowable Current=500A
Output=1mV/A (Max.500mv), Accuracy: \pm 0.5% rdg., \pm 0.02%f.s
Protection: CAT III 600V
Termination: Φ 14 Circular Push-Pull Connector



PMC-SCCP-50A-20mA-L-X-D In=AC/DC 50A, Max.Allowable Current=50A
PMC-SCCP-500A-20mA-L-X-D In=AC/DC 500A, Max.Allowable Current=500A
Output=Max. 20mA, Accuracy: \pm 1%f.s.
Protection: CATIII 600V
L=2M, Φ 63mm, Termination: Φ 14 Circular Push-Pull Connector



Clips & Plugs

Alligator Clips

8xAlligator Clips with 4mm Banana Jack, Jaw opening: 27mm
Length: 83.5mm
Max. Current: 10A



Plug pin and Adapter

4 Pairs (Black and Red), 4mm Banana Jack to 2mm Pin Tip Plug Adapter (1)
4 Pairs (Black and Red), 4mm Banana Jack to 4mm Banana Plug Adapter (2)
4 Pairs (Black and Red), 4mm Banana Jack to M3 Thread Stud Adapter (3)



Flexible Rogowski Coil

PMC-SCCP-5kA-500mV-L-C-C-254, L=2m, Φ 254mm

PMC-SCCP-5kA-500MV-L-C-C-371, L=2m, Φ 371mm

In=AC 500A/5kA, Max.Allowable Current=5.5kA

Output=AC 1mV/A @ 500A, AC 0.1mV/A @ 5kA (Max.5V)

Accuracy= \pm 2.0% rdg., Protection: CAT III 1000V/CAT IV 600V

Termination: Φ 14 Circular Push-Pull Connector



Power Adapter for Tablet

33W AC Power Adapter for Android Tablet

- Input: 100-240VAC, 50/60Hz
- Output: 11V/3A, 20V/1.35A, 12V/2.25A, 9V/3A, 5V/3A
- Cable Length: 1m
- Plug Type: Type A



4G Antenna

Dual 4G SMA antenna kit: 1xRubber Duck Antenna, 1xMagnetic-Mount Antenna with 3m cable

Rubber Duck Antenna

Frequency Range: 2400-2500MHZ
Band Width: 100MHZ
VSWR: \leq 2.0, Gain: 2.5-3 dBi
Power: 50W



Magnetic-mount Antenna

Frequency Range: 824-960/1710-2700 MHz
Band Width: 136/990MHZ
VSWR: \leq 3.0, Gain: 3.0dBi
Power: 50W

Email: sales@cet-global.com

Website: www.cet-global.com

Copyright © CET Inc. All rights reserved.

Your Local Representative

V.00 03.14.2025